

The oil tight fuse links are designed for use in oil filled switchgear. This type was pioneered in the U.K. and the Bussmann range has been in continuous manufacture for almost 40 years, being by far the most widely used device of its kind in the world. Over 1,000,000 Bussmann branded fuse links have been put into service without a single reported case of oil ingress. A unique triple seal system ensures against long term seal deterioration. Low power dissipation ensures cool running in oil filled switchgear. The range is not suitable for use inside oil filled transformer tanks where high oil temperatures may be expected.

Features: Pyrotechnic striker pin


| Part Number | Alternative Part Number | Ampere Rating | Voltage | I.R. | Striker Pin | Length "L" (mm) |
|-------------|-------------------------|---------------|---------|------|-------------|-----------------|
| I2OEFMA6.3 | – | 6.3A | 12kV | 40kA | Yes | 254 |
| I2OEFMA10 | – | 10A | 12kV | 40kA | Yes | 254 |
| I2OEFMA16 | – | 16A | 12kV | 40kA | Yes | 254 |
| I2OEFMA20 | 3014436.20 | 20A | 12kV | 40kA | Yes | 254 |
| I2OEFMA25 | – | 25A | 12kV | 40kA | Yes | 254 |
| I2OEFMA31.5 | – | 31.5A | 12kV | 40kA | Yes | 254 |
| 3014436.35 | 3014436.35 | 35A | 12kV | 40kA | Yes | 254 |
| I2OEFMA40 | 3014436.40 | 40A | 12kV | 40kA | Yes | 254 |
| I2OEFMA50 | – | 50A | 12kV | 40kA | Yes | 254 |
| 3014436.56 | 3014436.56 | 56A | 12kV | 40kA | Yes | 254 |
| I2OEFMA63 | – | 63A | 12kV | 45kA | Yes | 254 |
| I2OHFMA71 | – | 71A | 12kV | 45kA | Yes | 254 |
| I2OHFMA80 | – | 80A | 12kV | 40kA | Yes | 254 |
| 3014436.90 | 3014436.90 | 90A | 12kV | 40kA | Yes | 254 |
| I2OHFMA100 | 3014436.100 | 100A | 12kV | 40kA | Yes | 254 |
| I2OHGMA6.3 | – | 6.3A | 12kV | 40kA | Yes | 359 |
| I2OHGMA10 | -- | 10A | 12kV | 40kA | Yes | 359 |
| I2OHGMA16 | – | 16A | 12kV | 40kA | Yes | 359 |
| I2OHGMA20 | – | 20A | 12kV | 40kA | Yes | 359 |
| I2OHGMA25 | – | 25A | 12kV | 40kA | Yes | 359 |
| I2OHGMA31.5 | – | 31.5A | 12kV | 40kA | Yes | 359 |
| I2OHGMA40 | – | 40A | 12kV | 40kA | Yes | 359 |
| I2OHGMA50 | – | 50A | 12kV | 40kA | Yes | 359 |
| I2OHGMA63 | – | 63A | 12kV | 40kA | Yes | 359 |
| I2OHGMA71 | – | 71A | 12kV | 40kA | Yes | 359 |
| I2OHGMA80 | – | 80A | 12kV | 40kA | Yes | 359 |
| I2OHGMA90 | -- | 90A | 12kV | 40kA | Yes | 359 |
| I2OHGMA100 | -- | 100A | 12kV | 40kA | Yes | 359 |
| KEMXO120 | KEMXO120 | 120A | 12kV | 40kA | Yes | 359 |
| I2OLGMA125 | – | 125A | 12kV | 40kA | Yes | 359 |



MEDIUM VOLTAGE

Pack Size (box): 1

Approvals: IEC 282-1, BS2692-1, ESI Std 12-8

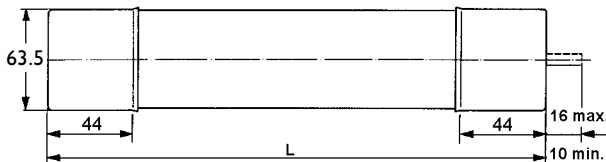

RELATED PRODUCTS:

Holders: Clips (p113)

