


14 X 51 SEMICONDUCTOR FUSES 690VAC / 700VDC

| W/O Striker Part Number | With Striker Part Number | Ampere Rating | |
|----------------------------|-----------------------------|------------------|------------|
| 145I-AR001 | - | 1A | |
| 145I-AR003 | - | 3A | |
| 145I-AR005 | - | 5A | |
| 145I-AR010 | 145I-AR010P | 10A | |
| 145I-AR012 | 145I-AR012P | 12A | |
| 145I-AR016 | 145I-AR016P | 16A | |
| 145I-AR020 | 145I-AR020P | 20A | |
| 145I-AR025 | 145I-AR025P | 25A | |
| 145I-AR032 | 145I-AR032P | 32A | |
| 145I-AR040 | 145I-AR040P | 40A | |
| 145I-AR050 | 145I-AR050P | 50A | |
| 145I-AR063* | - | 63A | NEW |

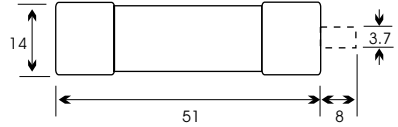

Dimensions in MM

Voltage & I.R.: 200kA at 690VAC
 30kA at 700VDC (10A to 50A)
 50kA at 250VDC (63A) * OEZ Brand

Characteristic: Type aR, Very Fast Acting. Contact sales for I²t.

Pack Size (box): 10


Holders: Clips (call), Carriers (p127), Blocks (p133)

Features: Product features a striker indicator (10A to 50A).

Approvals: IEC/EN 60269, UL248, CE **RoHS**

14 X 51 SEMICONDUCTOR FUSES 690VAC / 440VDC

| W/O Striker Part Number | With Striker Part Number | Ampere Rating | Total I ² t at 690VAC |
|----------------------------|-----------------------------|------------------|-------------------------------------|
| - | 145I-GR002P | 2A | TBA |
| 145I-GR004 | 145I-GR004P | 4A | 17 |
| 145I-GR006 | 145I-GR006P | 6A | 48 |
| 145I-GR008 | 145I-GR008P | 8A | 30 |
| 145I-GR010 | 145I-GR010P | 10A | 47 |
| 145I-GR012 | 145I-GR012P | 12A | 68 |
| 145I-GR016 | 145I-GR016P | 16A | 120 |
| 145I-GR020 | 145I-GR020P | 20A | 170 |
| 145I-GR025 | 145I-GR025P | 25A | 333 |
| 145I-GR032 | 145I-GR032P | 32A | 679 |
| 145I-GR040 | 145I-GR040P | 40A | 1 331 |
| 145I-GR050 | 145I-GR050P | 50A | 2 200 |

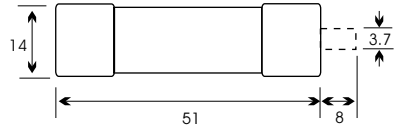

Dimensions in MM

Voltage & I.R.: 200kA at 690VAC
 30kA at 440VDC (Excluding 2A)

Characteristic: Type gR, Very Fast Acting

Pack Size (box): 10

Holders: Clips (call), Carriers (p127), Blocks (p133)

Features: Product features a striker indicator (8A to 50A).

Approvals: IEC/EN 60269, UL248, CE **RoHS**

RELATED PRODUCTS:



Fuse Block
(see p.133)



Fuse Carrier
(see p.127)



Strikers: A striker is a pin that pops out with force from the top side of one fuse cap. This striker has a dual function. Firstly it acts as a visual indication that a fuse has blown. Secondly it can also be used in-conjunction with a microswitch to trigger an alert of a problem.