

500VAC gG		
Part Number	Ampere Rating	Body Size
00C-NB002	2A	000 / 00C
00C-NB004	4A	000 / 00C
00C-NB006	6A	000 / 00C
00C-NB010	10A	000 / 00C
00C-NB016	16A	000 / 00C
00C-NB020	20A	000 / 00C
00C-NB025	25A	000 / 00C
00C-NB032	32A	000 / 00C
00C-NB035	35A	000 / 00C
00C-NB040	40A	000 / 00C
00C-NB050	50A	000 / 00C
00C-NB063	63A	000 / 00C
00C-NB080	80A	000 / 00C
00C-NB100	100A	000 / 00C
00C-NB125	125A	000 / 00C
00C-NB160*	160A*	000 / 00C
00-NB125	125A	00
00-NB160	160A	00



690VAC gG		
Part Number	Ampere Rating	Body Size
00C-GG002	2A	000 / 00C
00C-GG004	4A	000 / 00C
00C-GG006	6A	000 / 00C
00C-GG010	10A	000 / 00C
00C-GG016	16A	000 / 00C
00C-GG020	20A	000 / 00C
00C-GG025	25A	000 / 00C
00C-GG032	32A	000 / 00C
00C-GG035	35A	000 / 00C
00C-GG040	40A	000 / 00C
00C-GG050	50A	000 / 00C
00C-GG063	63A	000 / 00C
00-GG063	63A	00
00-GG080	80A	00
00-GG100	100A	00
00-GG125	125A	00
00-GG160	160A*	00

I.R. 500V: 120kA at 500VAC (Type gG/gL)
I.R. 690V: 100kA at 690VAC (Type gG/gL/aM)
I.R. 660V: 100kA at 690VAC (Type gG/gL/aM)*
Voltage: VAC as rated. VDC call for confirmation.
 *Special range 400V only.

Pack Size (box): 3

Holders: Bases (p 138), Disconnect Switches (p 142-143)

Accessories: NH-Extractor (p 150)

Approvals: IEC60269, DIN 43620, VDE 0636


Notes: gL (general application-normal acting).
 aM (motor start-delayed action).

Features: 'Flag' indicator located on top plate of fuse is standard.
 New dual indicator versions also include center body 'visual' indicator.
Optional NH Fuse Ranges: Isolated gripping lugs. Mining & marine.

690VAC aM		
Part Number	Ampere Rating	Body Size
00C-AM002	2A	000 / 00C
00C-AM004	4A	000 / 00C
00C-AM006	6A	000 / 00C
00C-AM010	10A	000 / 00C
00C-AM016	16A	000 / 00C
00C-AM020	20A	000 / 00C
00C-AM025	25A	000 / 00C
00C-AM032	32A	000 / 00C
00C-AM035	35A	000 / 00C
00C-AM040	40A	000 / 00C
00C-AM050	50A	000 / 00C
00C-AM063	63A	000 / 00C
00-AM080	80A	00
00-AM100	100A	00
00-AM125	125A	00
00-AM160	160A	00

Dimensions in MM

Size	A	B	C	D	E
00C	79	53	52	21	15
00	79	53	56	28	15

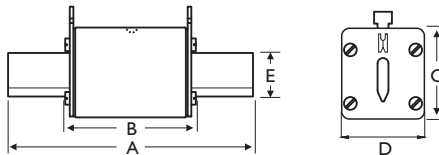

RELATED PRODUCTS:



Fuse Bases
(see p.138)



Fuse Switch Disconnectors
(see p.142-143)



Fuse Extractor
(see p.150)