


## 8.5 X 31.5MM CARTRIDGE FUSES

Fast Acting Type gG/gL Part Number	Slow Acting Type aM Part Number	Ampere Rating
C-NB.500	-	500mA
C-NB001	C-SB001	1A
C-NB002	C-SB002	2A
C-NB004	C-SB004	4A
C-NB006	C-SB006	6A
C-NB008	C-SB008	8A
C-NB010	C-SB010	10A
C-NB012	C-SB012	12A
C-NB016	C-SB016	16A
C-NB020	C-SB020	20A
C-NB025	C-SB025	25A



Dimensions in MM

**I.R.:** 20kA at 400VAC

**Voltage:** 400VAC


**Pack Size (box):** 10

**Holders:** Din Rail Mount (please call)

**Approvals:** IEC [RoHS](#)

## 10.3 X 38.1MM CARTRIDGE FUSES

Fast Acting Type gG/gL Part Number	Slow Acting Type aM Part Number	Ampere Rating
CH10-NB.500	CH10-SB.500	500mA
CH10-NB001	CH10-SB001	1A
CH10-NB002	CH10-SB002	2A
CH10-NB004	CH10-SB004	4A
CH10-NB006	CH10-SB006	6A
CH10-NB008	CH10-SB008	8A
CH10-NB010	CH10-SB010	10A
CH10-NB012	CH10-SB012	12A
CH10-NB016	CH10-SB016	16A
CH10-NB020	CH10-SB020	20A
CH10-NB025	CH10-SB025	25A
CH10-NB032	CH10-SB032	32A

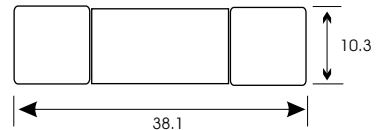

Dimensions in MM

**I.R.:** 120kA at rated voltage (except CH10-SB032)  
100kA at 400VAC (CH10-SB032)

**Voltage (gG):** 500VAC (500mA to 25A)  
400VAC (32A)

**Voltage (aM):** 500VAC (500mA to 16A)  
400VAC (20A to 32A)

**Pack Size (box):** 10

**Holders:** Clips (p113), Blocks (p133), Panel (p120)  
Carrier (p127-128), Inline (p122), Disconnecter (p140)

**Approvals:** IEC [RoHS](#)

## NEUTRAL LINKS CARTRIDGE TYPE

Neutral links can be used in a fuse holder if circuit protection is NOT required.

Part Number	Replaces Fuse	Link Dimensions
43097	M205	5 x 20mm
43099	3AG / 3AB	6.35 x 31.75mm
CH10-NTRL	10 x 38mm	10.3 x 38.1mm
CH14-NTRL	14 x 51mm	14.3 x 51mm
CH22-NTRL	22 x 58mm	22.2 x 58mm

**Warning:**

Neutral links do NOT provide circuit protection. A fuse must be used if you require circuit protection.

