


MICRO ISO RELAYS 871 SERIES




Part Number	Volt	Contact		Ampere Rating		Terminals	Protection	Bracket	Enclosure
		Action	N/O	N/C	N/O				
871 IACRI12	12V	SPST	35A	-	2x 4.8mm, 2x 6.3mm	½W 680Ω resistor	No	Flux Tight	
871 ICCRI12	12V	SPDT	35A	20A	3x 4.8mm, 2x 6.3mm	½W 680Ω resistor	No	Flux Tight	
871 IACRI24	24V	SPST	15A	-	2x 4.8mm, 2x 6.3mm	½W 2700Ω resistor	No	Flux Tight	
871 ICCRI24	24V	SPDT	15A	10A	3x 4.8mm, 2x 6.3mm	½W 2700Ω resistor	No	Flux Tight	

Coil Current: 97.5mA (12V), 49.6mA (24V)
Coil Resistance: 123Ω (12V), 483Ω (24V)
Contact Voltage Drop: Typ. 40mV at 10A
Contact Material: Silver Tin Oxide alloy (Ag3Sn)
Operate / Release Time: 10ms max. / 10ms max.
Enclosure: Flux tight.
Temperature: -40 to +125°C (no freezing)
Mechanical Life Expectancy: 10 million operations.
Pack Size: 1pc, 10pcs, 100pcs, 500pcs.
Options: Sealed Washable / Dust cover enclosure.
 Diode protection. RoHS
Approval: ELV-2000/53/EC
Suits Holders & Blocks: Pages 137-138, 170.




Dimensions in MM

871 IACRI series



871 ICCRI series



Terminal Sizes

- 4.8mm
- 6.3mm (1/4")


MINI ISO RELAYS 896H SERIES



Part Number	Volt	Contact		Ampere Rating		Terminals	Protection	Bracket	Enclosure
		Action	N/O	N/C	N/O				
896H1AHCRI12	12V	SPST	50A	-	4 x 6.3mm	½W 680Ω resistor	No	Flux Tight	
896H1CHCRI12	12V	SPDT	50A	30A	5 x 6.3mm	½W 680Ω resistor	No	Flux Tight	
896H2AHCRI12	12V	DPST	2 x 30A	-	5 x 6.3mm	½W 680Ω resistor	No	Flux Tight	
896H1AHCRI24	24V	SPST	20A	-	4 x 6.3mm	½W 2700Ω resistor	No	Flux Tight	
896H1CHCRI24	24V	SPDT	20A	15A	5 x 6.3mm	½W 2700Ω resistor	No	Flux Tight	
896H2AHCRI24	24V	DPST	2 x 10A	-	5 x 6.3mm	½W 2700Ω resistor	No	Flux Tight NEW	


Coil Current: 133mA (12V), 66.7mA (24V)
Coil Resistance: 90Ω (12V), 360Ω (24V)
Contact Voltage Drop: Typ. 50mV at 10A
Contact Material: Silver Tin Oxide alloy (Ag3Sn)
Operate / Release Time: 20ms max. / 20ms max.
Enclosure: Flux tight.
Temperature: -40 to +125°C (no freezing)
Mechanical Life Expectancy: 10 million operations.
Pack Size: 1pc, 10pcs, 100pcs, 400pcs, 1200pcs.
Options: Sealed Washable / Dust cover enclosure. Diode protection.
Approval: ELV-2000/53/EC RoHS
Suits Holders & Blocks: Pages 137-138, 170 - 172.

All Terminals
 6.3mm (1/4")

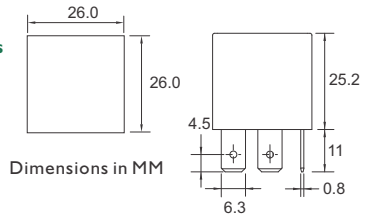


Dimensions in MM

896H1AHCRI series



896H1CHCRI series



896H2AHCRI series Double Pole (N/O)

