

JCASE FUSE IN-LINE HOLDER SPLASHPROOF



IP67

- Suit either Low Profile JCASE™ fuses (LJC) or original standard JCASE fuses (JTF).
- They offer size and weight savings compared to MAXI™ fuse holders.
- Include a protective cover for splash resistance.
- Fuse links are compact and incorporate a design advantage over blade fuses. Over time the spring clips that hold blade fuses will weaken. In cartridge fuses, the weaker female part is designed into the disposable fuse so that the grip and electrical connection will never weaken.

Part Number	Description
FHJCI002	Fuse holder with cover



Rating: 60A
Voltage: 58VDC
Wire Thickness: #8AWG
Cable Insulation: GXL, 125°C
Operating Temperature Range: -40°C to +125°C
Max Fuse Insertion Force: 49 Nm
Pack Size: 1, 10, 50, 100, 250
Approvals: [RoHS](#)


RELATED PRODUCTS:



Low Profile Jcase
(see page 20)



Jcase
(see page 21)

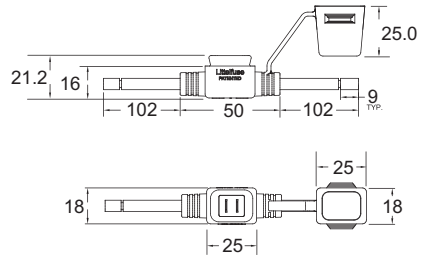

Dimensions in MM

MIDI FUSE IN-LINE HOLDER WITH COVER



FUSE HOLDERS

The inline Midi fuse holder is designed for use with bolt-down Midi fuses. It may be installed directly inline with the cables with no mounting required. The Inline Midi fuse holder can be used with heat shrink tubing for applications requiring more splash resistance. The curved design of the cover aids in prevention of tube-splitting during application.

Part Number	Description
04980921GXM5	Fuse holder includes cover and hardware.

Voltage: 32V
Rating: 200A
Operating Temperature Range: -40°C to +125°C
Max. Wire Size: 20mm²
M5 Torque Rating: 5Nm
Base/Cover Material: UL 94V-0 glass-filled nylon
Bolts: Zinc plated steel M5 x 0.8
Hardware: Zinc-plated steel nuts with nylock inserts (included).
Pack Size: 1, 10, 100
Notes: Midi fuse is not included.
Approvals: [RoHS](#)




Assembled Holder


RELATED PRODUCTS:



Midi Fuses
(see page 24)



Side View



Top View



Email: info@prolegproducts.com.au
 Web: www.prolegproducts.com.au