


Part Number	Ampere Rating	Voltage AC	Voltage DC
FWS-2A20F	2A	2000V	1000V
FWS-6A20F	6A	2000V	1000V
FWS-8A20F	8A	2000V	1000V
FWS-10A20F	10A	1400V	1000V
FWS-12A20F	12A	1400V	1000V
FWS-15A20F	15A	1400V	1000V
FWL-20A20F	20A	1200V	1000V
FWL-25A20F	25A	1200V	1000V
FWL-30A20F	30A	1200V	1000V



Dimensions are in MM

**I.R.:** 45kA at rated VAC, 30kA at 1000VDC  
**Voltage:** See above  
**Characteristic:** Type gR, Very Fast Acting  
**Pack Size (box):** 10  
**Notes:** Indicator version also available.  
**Approvals:** CE IEC



**RELATED PRODUCTS:**

**CHI27-I**

**Fuse Disconnecter**

# CHI27-I (see p.140)

SEMICONDUCTOR

Part Number	Ampere Rating	Voltage AC	Voltage DC
IHD36*	1A	1200V	750V
TAC2	2A	1200V	660V
TAC4	4A	1200V	660V
TAC6	6A	1200V	660V
TAC10	10A	1200V	660V
TAC16	16A	1200V	660V
TAC20	20A	1200V	660V
TAC25	25A	1200V	660V
TAC32	32A	1200V	660V
TSC35	35A	1200V	750V
40KC36*	40A	-	750V
TSC50	50A	1200V	660V
TSC63	63A	1200V	750V



**Closed Tag - TAC Series**



**Open Tag - HD36 / KC36 Series\***


**Characteristic:** Type gR, Very Fast Acting  
**Pack Size (box):** 10  
**Notes:** HD and KC series are not recommended for new designs.

**RELATED PRODUCTS:**

**Fuse Carrier**

# RSL63H (see p.129)

**RSL63H**

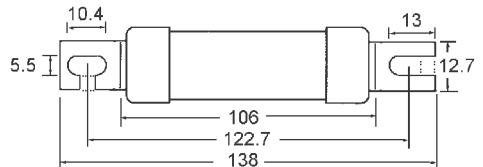

Ampere Ratings	Dimensions in MM	
	A	B
1A - 32A	21.8	22.0
35A - 63A	27.0	27.8

