

EFS (125A-250A) SERIES (TKM / N11)

Bussmann Part Number	Redspot (415V) Part Number	Ampere Rating	Voltage (VAC)	Type	Diagram
EFS125	-	125A	415V	gG	1
EFS160	-	160A	415V	gG	1
EFS200	-	200A	415V	gG	1
EFS250	TKM250L	250A	415V	gG	1
-	TKM315L	315A	415V	gG	1

EFS (<250A) Specification

I.R.: 80kA at rated VAC
Voltage: VAC (As listed)
 VDC (Please call)

Characteristic: See Type Listing


Pack Size (box): 1

Holders: Carriers (p129)

Notes: 660V versions also available contact sales for further information.

Approvals: BS88, IEC269-1

Diagram 1

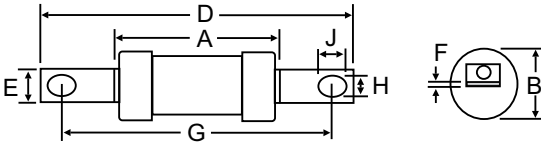

EFS (125A - 250A) TKM (315A)



EFS (315A) & EF SERIES SIZE C1 (TM / P11)

Bussmann Part Number	Redspot (415V) Part Number	Ampere Rating	Voltage (VAC)	Type	Diagram
EFS315	-	315A	415V	gG	2
EF355	TM355L	355A	415V	gG	2
EF400	TM400L	400A	415V	gG	2
EF400M500	-	400A (500M)	550V	gM	2

EFS (315A) / EF Specification

I.R.: 80kA at rated VAC
Voltage: VAC (As listed)
 VDC (Please call)

Characteristic: See Type Listing


Pack Size (box): 1

Holders: Carriers (p129)

Notes: 660V versions also available contact sales for further information.

Approvals: BS88, IEC269-1

Diagram 2

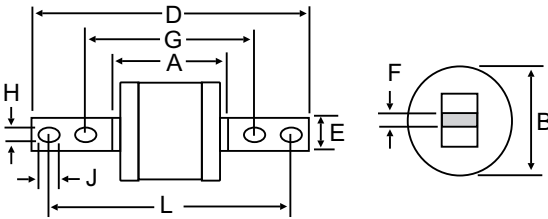

EFS (315A) EF (355A - 400M500A)



Dimensions in MM

Fuse	Ampere Rating	Diagram	A	B	D	E	F	G	H	J	L
EFS	125A - 250A	1	47	31	158	19	3.2	133	10.5	12.5	-
TKM315L	315A	1	47	41	159	26	3.2	133	10.5	14.0	-
EFS315	315A	2	50	38	209	25.4	4.7	133	10.5	12.5	184
EF	355A - 400A	2	75	59	210	25.4	4.7	136	10.5	15.5	187
EF	400M500	2	77.5	74	210	25.4	6.4	134	10.5	15.5	185